

IMT-1A65H005-N

1/3.1" 13MP COB F2.2 DFOV 87.6 Degree M6.5 Lens




Lens Model	IMT-1A65H005-N
Sensor Format	1/3.1"
Resolution	13 MP
Sensor Type	COB
Structure	5P
Max Image Circle	Ø5.8
F/NO.	2.2 +/- 5%
EFL (mm)	3.05
TTL (mm)	4.60
FOV	Field of View
Diagonal DFOV	87.6°
Horizontal HFOV	74.9°
Vertical VFOV	59.4°
TV Distortion	<1%
CRA	<34.9°
Lens Filter	None
Barrel	M6.5*P0.25
KLT Camera Modules	KLT-OIS-USB1A-IMX258 V1.0
Use IMT Made Lenses	KLT-D3MA-IMX258 V5.0

IMT-1A65H005-N

1/3.1" 13MP COB F2.2 DFOV 87.6 Degree M6.5 Lens



IMT Lens on
the real
Camera

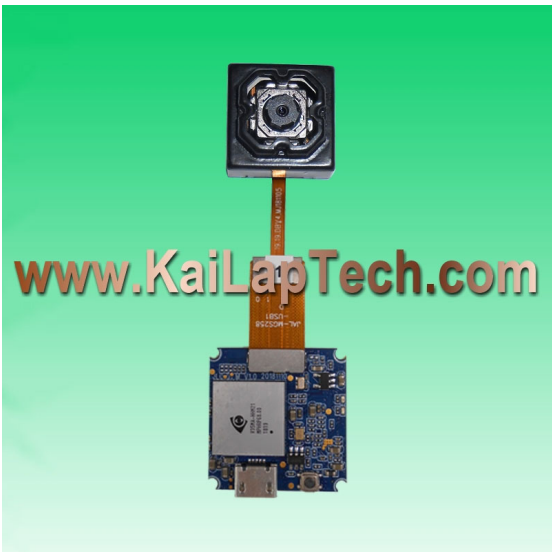

KLT is our
Camera
Modules
Design and
Manufacture
Partner

www.KaiLapTech.com

www.InMakerTech.com Sales@InMakerTech.com China: (+86) 17727326718 HK: (+852) 69089316

All rights reserved @ InnoMaker Technologies Limited. Specifications subject to change without notice.

KLT-OIS-USB1A-IMX258 V1.0

**SONY IMX258 USB Interface Auto Focus 13MP Camera Module
Micro Gimbal Stabilizer, Optical Image Stabilization (OIS) Platform**



Camera Module No.	KLT-OIS-USB1A-IMX258 V1.0	
Image Sensor	IMX258	Output Format: MJPG, YVY2, H.264
Stabilizer	Micro Gimbal Stabilizer (MGS)	60 FPS 640 x 480 (VGA)
EFL	3.05 mm	30 FPS 1280 x 720 (HD 720P)
F.NO	2.2	30 FPS 1920 x 1080 (Full HD)
Pixel	4224 x 3192	20 FPS 4224 x 3192 (13MP)
View Angle	87.6°	Supporting OS
Lens Type	1/3.06 inch	Windows 7, 8.1, 10, Vista
Lens Dimensions	19.00 x 19.00 x 9.90 mm	Windows XP SP2 under UVC
Module Size	39.00 x 19.00 mm	Linux Kernel V2.6.2.1 or later
Module Type	Auto Focus	MAC OS 10.4 or later
IMT Lens Model	IMT-1A65H005-N	Operating Voltage: 5V +/- 5%
Interface	USB 2.0	Compliant with UVC Version 1.0

Mating USB Cable Part No. KLT-USB3A-Cable

USB Cable Extension Cord. Sold Separately.

OIS Camera Modules

(OIS = Optical Image Stabilization Platform)

World's Smallest Gimbal Stabilizer




Core Technologies:

- MGS (micro gimbal stabilizer)
(The lens and image sensor tilt together)
- ± 5 deg max. compensation angle
(More than enough for walking and jogging)
- Innovative anti-shaking solutions with 10+ patents
- Integrated design, including a gyroscope and an MGS driver IC

EIS:



MGS:

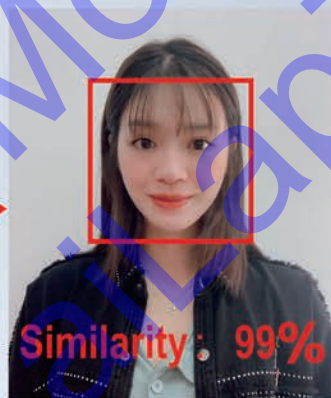

Face recognition success rate



MGS can significantly reduce blur especially in low-light conditions, and thus support dynamic face recognition and other emerging technologies

Main Advantages:

- Support horizontal FOV over 100deg
- Support all-glass lens
- 2m+ drop test
- Easy to use
- One-stop anti-shaking solution provider
- Light weight down to 5g
- Small size down to 19×19mm
- Competitive price

Ordering Models



KLT-OIS-USB1A-IMX258 V1.0



KLT-OIS-AF-IMX258-C V1.0

MGA190 series:

Size: 19×19×9.9mm
 Auto Focus MGS
 Largest FOV: 100deg
 Max. compensation angle: ±5deg
 Weight: 5g
 Support a wide variety of lenses and image sensors
 Supported sensors:
 OmniVision OV5640, Sony IMX179 & IMX258

MGF250 series:

Size: 25x25x15mm
 Fixed Focus MGS
 Largest FOV: 140deg
 Max. compensation angle: ±5deg
 Weight: 28g
 Support a wide variety of lenses and image sensors
 Supported sensors:
 Onsemi AR1335, OmniVision OV2718 & OV4689



KLT-OIS-FF-OV4689 V7.0A

Module	Resolution	Sensor	Focus	DFOV
KLT-OIS-AF-IMX258-C V1.0	13 MP OIS	IMX258-C	Auto	87.6
KLT-OIS-USB1A-IMX258 V1.0	13 MP OIS	IMX258	Auto	87.6
KLT-OIS-FF-OV4689 V7.0A	4 MP OIS	OV4689	Fixed	122

Product Applications:



AI face recognition



Body worn camera



Robot



AR/VR smart glasses



Sport DV




KLT-D3MA-IMX258 V5.0

SONY IMX258 MIPI Interface Auto Focus 13MP Camera Module



Camera Module No.	KLT-D3MA-IMX258 V5.0
Image Sensor	IMX258
EFL	3.05 mm
F.NO	2.2
Pixel	4224 x 3136
View Angle	87.6°
Lens Type	1/3.06 inch
Lens Dimensions	8.50 x 8.50 x 5.65 mm
Module Size	100.00 x 8.50 mm
Module Type	Auto Focus
Interface	MIPI
IMT Lens Model	IMT-1A65H005-N

Mating Connector Part No. BBR43-30KB533

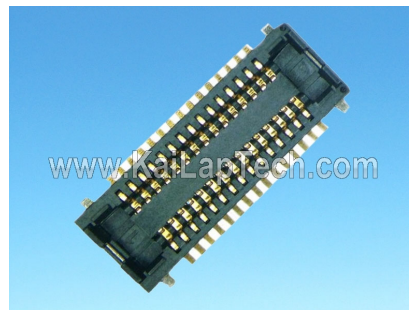

Mating Connector On Main Board. Sold Separately.

[Product Brief]

Ver.1.0

IMX258

Diagonal 5.867 mm (Type 1/3.06) 13Mega-Pixel CMOS Image Sensor with Square Pixel for Color Cameras

Description

IMX258 is a diagonal 5.867mm (Type 1/3.06) 13 Mega-pixel CMOS active pixel type stacked image sensor with a square pixel array. It adopts Exmor RSTM technology to achieve high speed image capturing by column parallel A/D converter circuits and high sensitivity and low noise image (comparing with conventional CMOS image sensor) through the backside illuminated imaging pixel structure. R, G, and B pigment primary color mosaic filter is employed. By introducing spatially multiplexed exposure technology, high dynamic range still pictures and movies are achievable. It

equips an electronic shutter with variable integration time. It operates with three power supply voltages: analog 2.7 V, digital 1.2 V and 1.8 V for input/output interface and achieves low power consumption.

In addition, this product is designed for use in cellular phone and tablet pc. When using this for another application, Sony does not guarantee the quality and reliability of product. Therefore, don't use this for applications other than cellular phone and tablet pc. Consult your Sony sales representative if you have any questions.


Functions and Features

- ◆ Back-illuminated and stacked CMOS image sensor Exmor RSTM
- ◆ Phase Detection pixel data output for Phase Detection Auto Focus
- ◆ High Dynamic Range (HDR) mode with raw data output.
- ◆ High signal to noise ratio (SNR).
- ◆ Full resolution @30fps (Normal / HDR). 4K2K @30fps (Normal / HDR) 1080p @60fps (Normal)
- ◆ Output video format of RAW10/8.
- ◆ Pixel binning readout and V sub-sampling function.
- ◆ Independent flipping and mirroring.
- ◆ CSI-2 serial data output (MIPI 2lane/4lane, Max. 1.3Gbps/lane, D-PHY spec. ver. 1.1 compliant)
- ◆ 2-wire serial communication.
- ◆ Two PLLs for independent clock generation for pixel control and data output interface.
- ◆ Dynamic Defect Pixel Correction.
- ◆ Fast mode transition. (on the fly)
- ◆ Dual sensor synchronization operation.
- ◆ 4K bit of OTP ROM for users.
- ◆ Built-in temperature sensor.

Device Structure

- ◆ CMOS image sensor
- ◆ Image size : Diagonal 5.867 mm (Type 1/3.06)
- ◆ Total number of pixels : 4224 (H) × 3192 (V) approx. 13.48 M pixels
- ◆ Number of effective pixels : 4224 (H) × 3144 (V) approx. 13.28 M pixels
- ◆ Number of active pixels : 4208 (H) × 3120 (V) approx. 13.13 M pixels
- ◆ Chip size : 5.990 mm (H) × 3.908 mm (V)
- ◆ Unit cell size : 1.12 μm (H) × 1.12 μm (V)
- ◆ Substrate material : Silicon

System block diagram

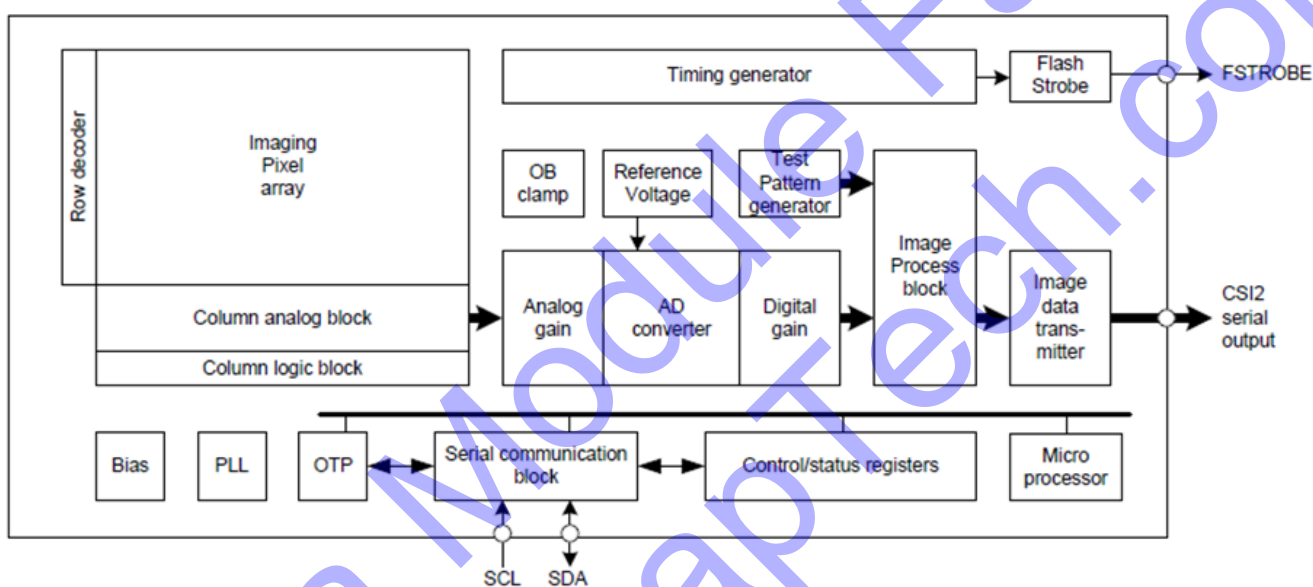

Exmor RS

* Exmor RS is a trademark of Sony Corporation. The Exmor RS is a Sony's CMOS image sensor with high-resolution, high-performance and compact size by replacing a supporting substrate in Exmor R™ which changed fundamental structure of Exmor™ pixel adopted column parallel A/D converter to back-illuminated type, with layered chips formed signal processing circuits.